


VK...

According to ISO 6164
符合ISO 6164

ISO 6164 方形法兰系列VKA/VKK


VKA

方形法兰一只
One square flange
带O槽焊管一只
One welding head with O-ring
O型圈一只
One O-ring
螺栓一组
Four bolts




VKAG

方形法兰一只
One square flange
带O槽闷盖一只
One flange plug with O-ring
O型圈一只
One O-ring
螺栓一组
Four bolts




VKK

方形法兰二只
Two square flanges
配对焊管一对
Two welding heads with O-ring
O型圈一只
One O-ring
螺栓一组
Four bolts




VKKG

方形法兰二只
Two square flanges
带O槽焊管一只
One welding head with O-ring
光面闷盖一只
One flange plug
O型圈一只
One O-ring
螺栓一组
Four bolts




VKW

90° 弯法兰一只
One 90° weld-on flange
O型圈一只
One O-ring
螺栓一组
Four bolts




VKV

三通法兰全套订货时:
Three way flange:
三通块一只
One three way flange:
VKA 三套
Three "VKA"




VKJ

带O槽焊管一只
One welding head with O-ring
O型圈一只
One O-ring




VKJN

光面焊管一只
One welding Head



VKA.../VKK...

According to ISO 6164
符合ISO 6164

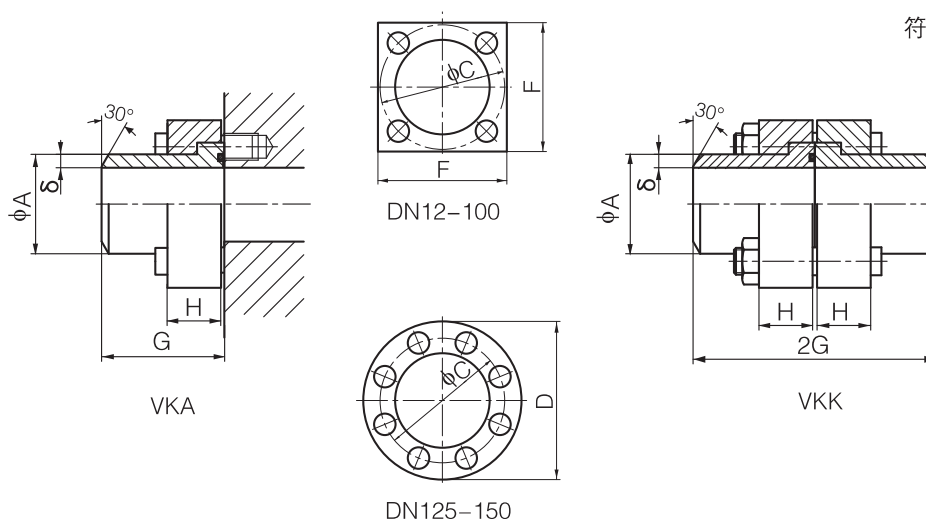


E

工作压力 PN(bar)	通径 DN	型号 Type	A × δ	C	F	D	H	G	O型圈 O-ring	螺栓 Metric	重量 Weight(kg)
160	12	VKA 12-2	16x2	44	50		19	43	16.3x2.4	4/M10x35	0.40
160	16	VKA 16-2	20x2.5	54	60		19	50	25.3x2.4	4/M10x35	0.65
160	20	VKA 20-2	25x3	54	60		19	50	25.3x2.4	4/M10x35	0.70
160	25	VKA 25-2	30x4	64	70		19	56	29.8x2.6	4/M12x35	0.90
160	32	VKA 32-2	38x5	72	80		24	64	34.5x2.6	4/M12x40	1.40
160	40	VKA 40-2	48.3x5	80	90		29	68	46.0x3.0	4/M16x50	2.00
160	50	VKA 50-2	60.3x6.3	98	100		38	80	53.3x5.33	4/M16x60	3.00
160	65	VKA 65-2	76.1x7.1	118	120		47	98	69.2x5.33	4/M20x70	5.20
160	80	VKA 80-2	101.6x10	175	180		58	135	100.0x6.0	4/M30x90	16.50
160	100	VKA 100-2	114.3x11	175	180		58	135	106.6x6.0	4/M30x90	16.90
160	125	VKA 125-2	152.4x16	200		245	69	150	132.7x7.0	8/M24x100	26.95
160	150	VKA 150-2	177.8x17.5	245		300	79	190	148.0x7.0	8/M30x110	46.50
160	12	VKK 12-2	16x2	44	50		19	82	16.3x2.4	4/M10x55	0.75
160	16	VKK 16-2	20x2.5	54	60		19	96	25.3x2.4	4/M10x60	1.15
160	20	VKK 20-2	25x3	54	60		19	96	25.3x2.4	4/M10x60	1.20
160	25	VKK 25-2	30x4	64	70		19	106	29.8x2.6	4/M12x60	1.70
160	32	VKK 32-2	38x5	72	80		24	122	34.5x2.6	4/M12x70	2.65
160	40	VKK 40-2	48.3x5	80	90		29	130	46.0x3.0	4/M16x80	3.80
160	50	VKK 50-2	60.3x6.3	98	100		38	153	53.3x5.33	4/M16x100	5.90
160	65	VKK 65-2	76.1x7.1	118	120		47	190	69.2x5.33	4/M20x120	9.90
160	80	VKK 80-2	101.6x10	175	180		58	262	100.0x6.0	4/M30x150	31.65
160	100	VKK 100-2	114.3x11	175	180		58	262	106.0x6.0	4/M30x150	32.15
160	125	VKK 125-2	152.4x16	200		245	69	292	132.7x7.0	8/M24x170	53.60
160	150	VKK 150-2	177.8x17.5	245		300	79	372	148.0x7.0	8/M30x200	92.75

VKA.../VKK...

According to ISO 6164
符合ISO 6164

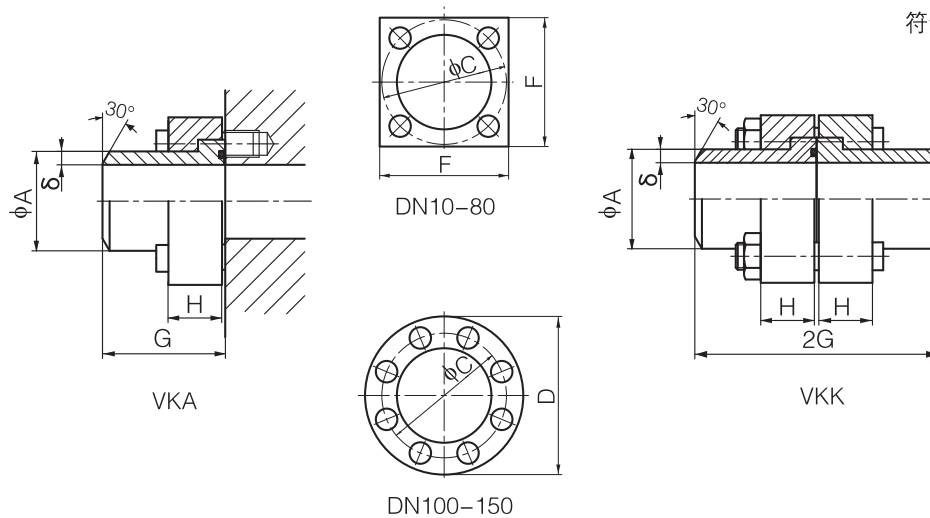


E

工作压力 PN(bar)	通径 DN	型号 Type	A × δ	C	F	D	H	G	O型圈 O-ring	螺栓 Metric	重量 Weight(kg)
250	10	VKA 10-3	17.2x3.6	44	50		20	43	16.3x2.4	4/M10x35	0.44
250	16	VKA 16-3	21.3x2.6	54	60		20	50	25.3x2.4	4/M10x35	0.71
250	20	VKA 20-3	26.9x3.6	64	70		20	56	29.8x2.6	4/M12x35	0.90
250	25	VKA 25-3	33.7x4.5	72	80		25	64	34.5x2.6	4/M12x40	1.40
250	32	VKA 32-3	42.4x5.6	80	90		30	68	43.0x3.0	4/M16x50	2.10
250	40	VKA 40-3	60.3x8	98	100		38	80	53.3x5.33	4/M16x60	3.10
250	50	VKA 50-3	76.1x10	118	120		47	98	61.0x5.0	4/M20x70	5.40
250	65	VKA 65-3	88.9x11	145	150		48	109	75.0x5.0	4/M24x75	9.00
250	80	VKA 80-3	101.6x12.5	175	180		58	135	88.0x6.0	4/M30x90	16.90
250	100	VKA 100-3	139.7x17.5	200		245	70	150	115.0x6.0	8/M24x100	27.85
250	125	VKA 125-3	168.3x20	245		300	80	190	148.0x7.0	8/M30x110	47.70
250	150	VKA 150-3	193.7x25	290		355	90	190	183.5x7.0	8/M36x130	53.20
250	10	VKK 10-3	17.2x3.6	44	50		20	82	16.3x2.4	4/M10x55	0.80
250	16	VKK 16-3	21.3x2.6	54	60		20	96	25.3x2.4	4/M10x60	1.22
250	20	VKK 20-3	26.4x3.6	64	70		20	106	29.8x2.6	4/M12x60	1.70
250	25	VKK 25-3	33.7x4.5	72	80		25	122	34.5x2.6	4/M12x70	2.70
250	32	VKK 32-3	42.4x5.6	80	90		30	130	43.0x3.0	4/M16x80	4.00
250	40	VKK 40-3	60.3x8	98	100		38	153	53.3x5.33	4/M16x100	6.00
250	50	VKK 50-3	76.1x10	118	120		47	190	61.0x5.0	4/M20x120	10.30
250	65	VKK 65-3	88.9x11	145	150		48	210	75.0x5.0	4/M24x130	17.45
250	80	VKK 80-3	101.6x12.5	175	180		58	262	88.0x6.0	4/M30x150	32.60
250	100	VKK 100-3	139.7x17.5	200		245	70	292	115.0x6.0	8/M24x170	54.00
250	125	VKK 125-3	168.3x20	245		300	80	372	148.0x7.0	8/M30x200	90.00
250	150	VKK 150-3	193.7x25	290		355	90	380	183.5x7.0	8/M36x220	105.00

VKA.../VKK...

According to ISO 6164
符合ISO 6164

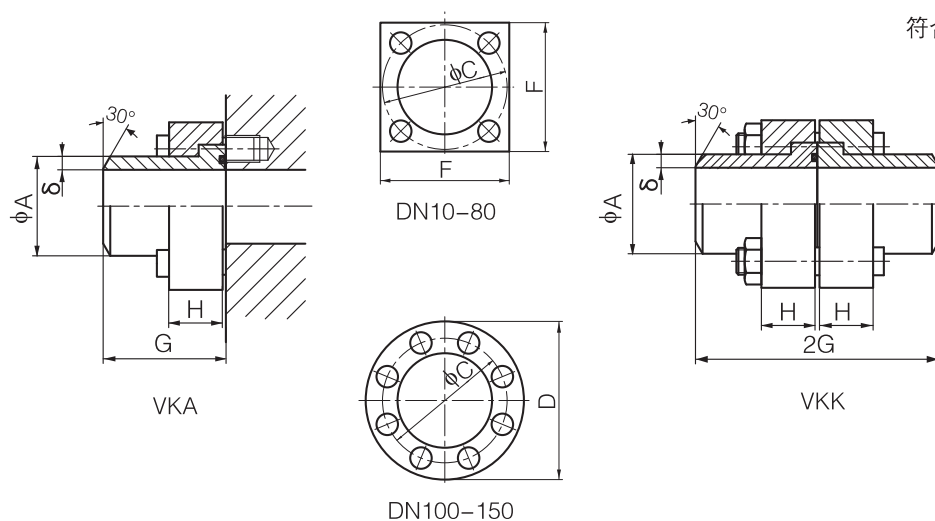


E

工作压力 PN(bar)	通径 DN	型号 Type	A × δ	C	F	D	H	G	O型圈 O-ring	螺栓 Metric	重量 Weight(kg)
315	10	VKA 10-4	17.2x3.6	44	50		20	43	16.3x2.4	4/M10x35	0.45
315	16	VKA 16-4	26.9x4.5	54	60		20	50	25.5x2.4	4/M10x35	0.70
315	20	VKA 20-4	33.7x5.6	64	70		20	56	29.8x2.6	4/M12x35	0.90
315	25	VKA 25-4	42.7x7.1	72	80		25	64	34.5x2.6	4/M12x40	1.45
315	32	VKA 32-4	48.3x8.0	80	90		30	68	43.0x3.0	4/M16x50	2.20
315	40	VKA 40-4	60.3x10	98	100		38	80	53.3x5.33	4/M16x60	3.20
315	50	VKA 50-4	76.1x12.5	118	120		47	98	61.0x5.0	4/M20x70	5.60
315	65	VKA 65-4	88.9x14.2	145	150		48	109	75.0x5.0	4/M24x75	9.50
315	80	VKA 80-4	114.3x17.5	175	180		58	135	88.0x6.0	4/M30x90	17.60
315	100	VKA 100-4	152.5x28	200		245	70	150	115.0x6.0	8/M24x100	29.30
315	125	VKA 125-4	177.8x30	245		300	80	190	148.0x7.0	8/M30x110	48.20
315	150	VKA 150-4	219.1x36	290		355	90	190	183.5x7.0	8/M36x130	55.10
315	10	VKK 10-4	17.2x3.6	44	50		20	82	16.3x2.4	4/M10x55	0.81
315	16	VKK 16-4	26.9x4.5	54	60		20	96	25.3x2.4	4/M10x60	1.21
315	20	VKK 20-4	33.7x5.6	64	70		20	106	29.8x2.6	4/M12x60	1.70
315	25	VKK 25-4	42.4x7.1	72	80		25	122	34.5x2.6	4/M12x70	2.70
315	32	VKK 32-4	48.3x8.0	80	90		30	130	43.0x3.0	4/M16x80	4.15
315	40	VKK 40-4	60.3x10	98	100		38	153	53.3x5.33	4/M16x100	6.25
315	50	VKK 50-4	76.1x12.5	118	120		47	190	61.0x5.0	4/M20x120	10.80
315	65	VKK 65-4	88.9x14.2	145	150		48	210	75.0x5.0	4/M24x130	18.35
315	80	VKK 80-4	114.3x17.5	175	180		58	262	88.0x6.0	4/M30x150	33.80
315	100	VKK 100-4	152.5x28	200		245	70	292	115.0x6.0	8/M24x170	57.20
315	125	VKK 125-4	177.8x30	245		300	80	372	148.0x7.0	8/M30x200	95.00
315	150	VKK 150-4	219.1x36	290		355	90	391	183.5x7.0	8/M36x220	109.20

VKA.../VKK...

According to ISO 6164
符合ISO 6164

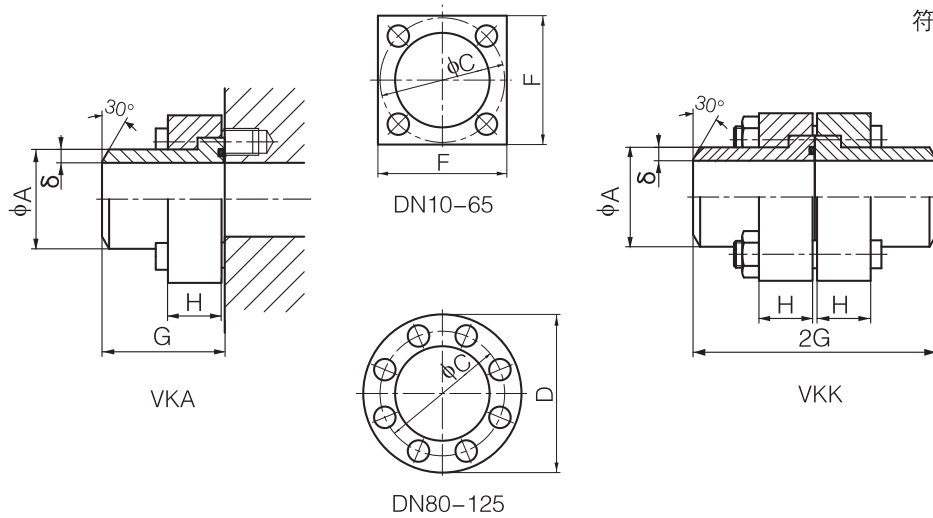


E

工作压力 PN(bar)	通路 DN	型号 Type	A × δ	C	F	D	H	G	O型圈 O-ring	螺栓 Metric	重量 Weight(kg)
400	10	VKA 10-5	17.2x3.6	44	50		20	43	16.3x2.4	4/M10x35	0.45
400	16	VKA 16-5	26.9x5.6	54	60		20	50	25.3x2.4	4/M10x35	0.70
400	20	VKA 20-5	33.7x6.3	64	70		20	56	29.8x2.6	4/M12x35	0.90
400	25	VKA 25-5	42.7x8.0	72	80		25	64	34.5x2.6	4/M12x40	1.45
400	32	VKA 32-5	60.3x12.5	98	100		38	80	53.3x5.33	4/M16x50	2.20
400	40	VKA 40-5	70.0x14.2	118	120		45	100	61.0x5.0	4/M20x60	3.20
400	50	VKA 50-5	88.9x17.5	145	150		48	109	75.0x5.0	4/M24x70	5.60
400	65	VKA 65-5	101.6x20.0	175	180		58	135	88.0x6.0	4/M30x95	9.50
400	80	VKA 80-5	139.7x28.0	200		245	70	150	115.0x6.0	8/M24x100	17.60
400	100	VKA 100-5	168.3x32.0	245		300	80	190	148.0x7.0	8/M30x110	29.30
400	125	VKA 125-5	219.1x45.0	290		355	90	190	183.5x7.0	8/M36x130	48.20
400	10	VKK 10-5	17.2x3.6	44	50		20	80	16.3x2.4	4/M10x55	0.81
400	16	VKK 16-5	26.9x5.6	54	60		20	94	25.3x2.4	4/M10x60	1.21
400	20	VKK 20-5	33.7x6.3	64	70		20	106	29.8x2.6	4/M12x60	1.70
400	25	VKK 25-5	42.4x8.0	72	80		25	122	34.5x2.6	4/M12x70	2.70
400	32	VKK 32-5	60.3x12.5	98	100		38	130	53.3x5.33	4/M16x80	4.15
400	40	VKK 40-5	70.0x14.2	118	120		45	190	61.0x5.0	4/M20x110	6.25
400	50	VKK 50-5	88.9x17.5	145	150		48	210	75.0x5.0	4/M24x120	10.80
400	65	VKK 65-5	101.6x20.0	175	180		58	262	88.0x6.0	4/M30x130	18.35
400	80	VKK 80-5	139.7x28.0	200		245	70	292	115.0x6.0	8/M24x170	33.80
400	100	VKK 100-5	168.3x32.0	245		300	80	372	148.0x7.0	8/M30x200	57.20
400	125	VKK 125-5	219.1x45.0	290		355	90	391	183.5x7.0	8/M30x220	95.00

VKW...

According to ISO 6164
符合ISO 6164

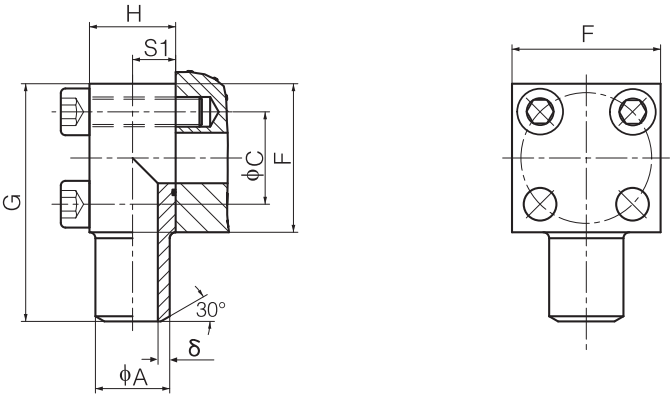


E

工作压力 PN(bar)	通径 DN	型号 Type	A × δ	C	F	S1	H	G	O型圈 O-ring	螺栓 Metric
250	10	VKW 10	17.2x3.6	44	50	17	29	80	16.3x2.4	4/M10x45
250	16	VKW 16	21.3x2.6	54	60	23	41	95	25.3x2.4	4/M10x55
250	20	VKW 20	26.9x3.6	64	70	26	47	110	29.8x2.6	4/M12x65
250	25	VKW 25	33.7x4.5	72	80	30	56	130	34.5x2.6	4/M12x75
250	32	VKW 32	42.4x5.6	80	90	35	64	140	43.0x3.0	4/M16x90
250	40	VKW 40	60.3x8	98	100	40	76	155	53.3x5.33	4/M16x100
250	50	VKW 50	76.1x10	118	120	53	100	175	61.0x5.0	4/M20x130
250	65	VKW 65	88.9x11	145	150	64	120	200	75.0x5.0	4/M24x155
250	80	VKW 80	101.6x12.5	175	180	73	140	220	88.0x6.0	4/M30x180

VKV...

According to ISO 6164
符合ISO 6164

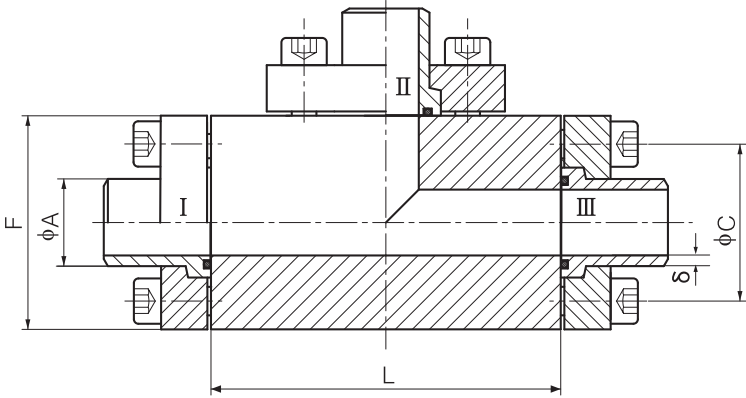

E

规格 Size	型号 Type	A × δ	C	F	L	O型圈 O-ring	螺栓 Metric	重量 Weight(kg)
10	VKV 10	17.2x3.6	44	50	100	16.3x2.4	参考配用法兰	1.60
16	VKV 16	21.3x2.6	54	60	110	25.3x2.4	参考配用法兰	2.60
20	VKV 20	26.9x3.6	64	70	115	29.8x2.6	参考配用法兰	3.90
25	VKV 25	33.7x4.5	72	80	125	34.5x2.6	参考配用法兰	5.40
32	VKV 32	42.4x5.6	80	90	140	43.0x3.0	参考配用法兰	7.30
40	VKV 40	60.3x8	98	100	160	53.3x5.33	参考配用法兰	10.00
50	VKV 50	76.1x10	118	120	180	61.0x5.0	参考配用法兰	16.00
65	VKV 65	88.9x11	145	150	200	75.0x5.0	参考配用法兰	27.00
80	VKV 80	101.6x12.5	175	180	240	88.0x6.0	参考配用法兰	49.00